

# OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 10 TOWNSHIP 16 RANGE 3

DATE: 5-30-03

PARTY CHIEF: Wilcoxon

CREW: \_\_\_\_\_

TYPE OF MARKER: Harrison


METHOD OF ESTABLISHMENT: County: 7-18-00

IN. S.P.C. E ZONE NAD '83


NAME: 16031004

N: 510597.3577(m)

E: 54559.9017(m)

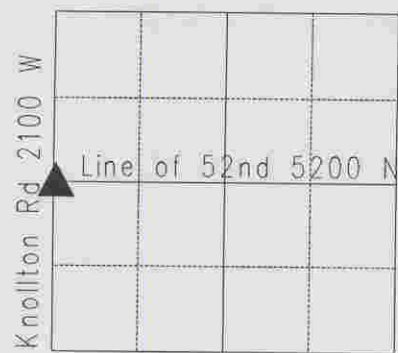

Asphalt Drive ADDRESS 5117

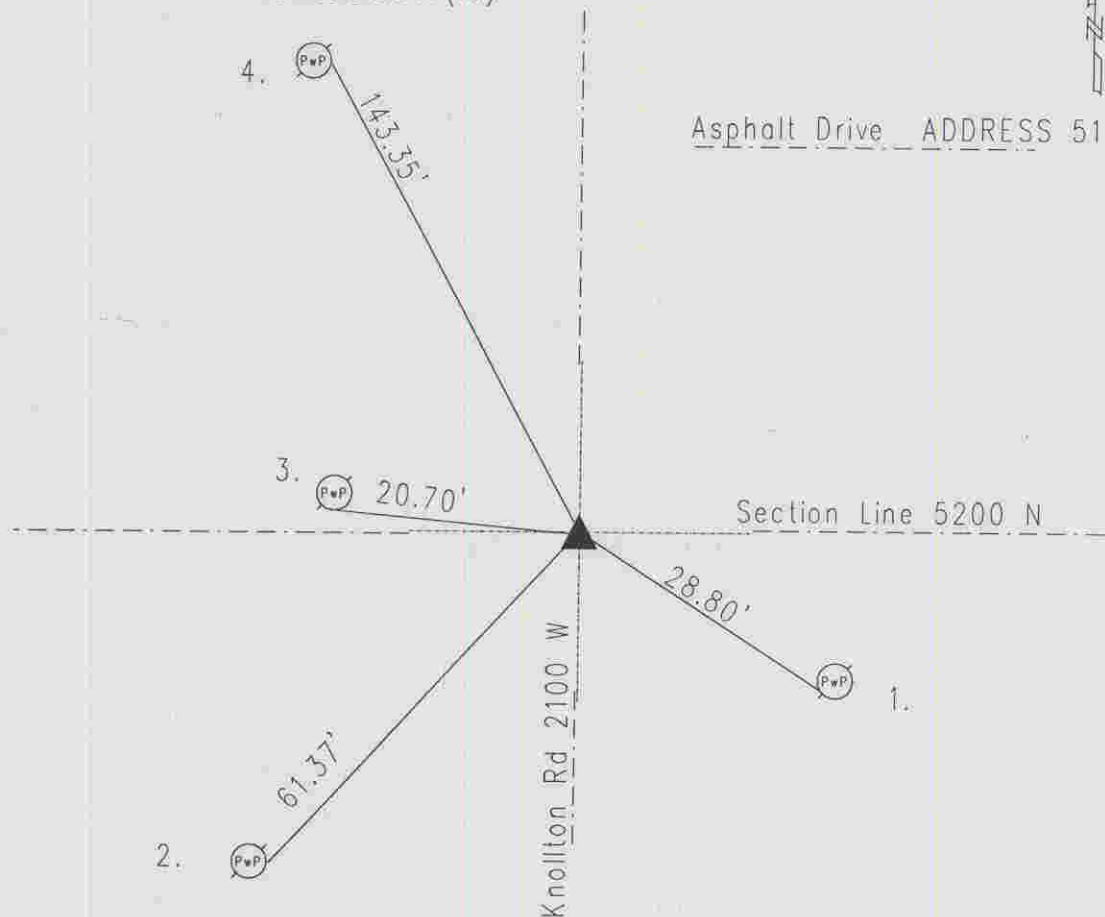

16031004

| REF. | DISTANCE | DESCRIPTION                  |
|------|----------|------------------------------|
| 1.   | 28.80'   | PK nail SW PwP#35-362 A 2"up |
| 2.   | 61.37'   | Road nail E PwP#5118 3"up    |
| 3.   | 20.70'   | PK nail S PwP#35-331-B 10"up |
| 4.   | 143.35'  | PK nail E PwP#36-331 B 60"up |

Corner originally set as a post in 1820 Wm.B.Laughlin with the following witnesses: 18" beech bearing north 64 degrees, thence east 22 links, and a 14" ash bearing south 86 degrees, thence west 9 links. (M.C.Atlas p. 7) A survey by H.B.Fatout on April 7,1882 indicates no stones or witnesses. (Washington Legal Book p. 87) Corner referenced by Miller on 12/4/75 and called a steel pin. Corner referenced by Greene on 2/27/87 and called a steel pin. Corner referenced by Kiste on 10/12/95 and called a R.R.spike set over R.R.spike 6" down. Corner referenced by Wilcoxon on 7/18/00 and called a cut x in R.R. spike. Corner excavated by Kiste on 5/19/03 and a R.R.spike was found 2" down. A 1" iron pin was found 17" down. A #205 cast iron Harrison Monument was set in position as the corner.